


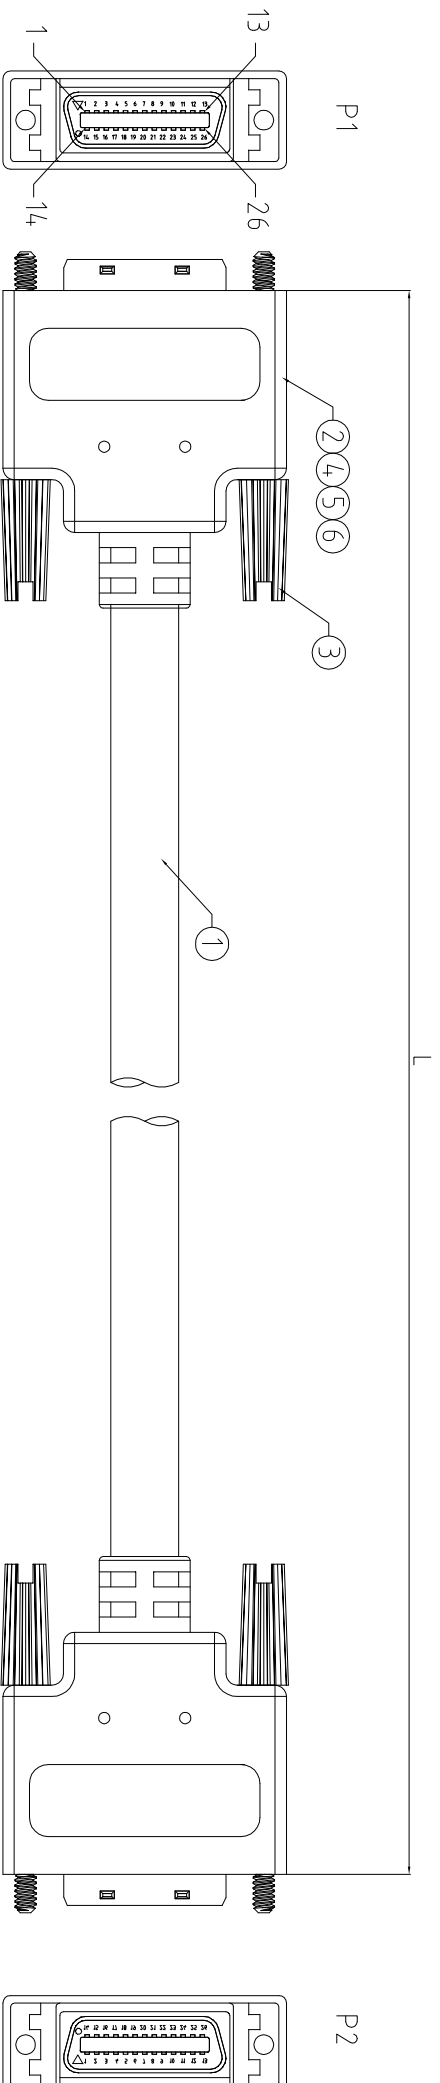

Wire Assignment:

Length and Part number:

No.	Part No:	LENGTH(MM)
1	KM-948	2000±30
2	KM-950	3000±50
3	KM-952	5000±50

NOTES:

1. OPEN/SHORT/INTERMITTENCE:100% TEST
2. DIELECTRIC WITHSTAND:AC100V/1MIN.
3. INSULATION RESISTANCE:DC 100V/10M Ω (MIN)
4. CONDUCTIVE RESISTANCE:See TABLE A

P1		P2		P1		P2
2		25		9		18
15		12		22		5
3		24		10		17
16		11		23		4
4		23		11		16
17		10		24		3
5		22		12		15
18		9		25		2
6		21		1		1
19		8			RED	
				14	DRAIN	14
7		20		13	DRAIN	13
20		7			BLACK	
8		19		26	BRAID	26
21		6				
				SHELL		SHELL

DESIGNED IN INDIA

ITEM	MATERIAL	DESCRIPTION	Q'TY	UNIT
①	CABLE	UL 20276 (28AWG+AL)X1TP+2+AWG×2C+D×2C+AB OD:9.0MM Jacket:Black PVC	1	PCS
②	CONN	MDR 26P Male PIN:5U" InsulatIn:Black Shell:NI	2	PCS
③	Screw	#4-40 Thumbscrew L=44MM	4	PCS
④	Inner Mold	LD-PE	N/A	KG
⑤	Over Mold	BLACK PVC	N/A	KG
⑥	Copper Foil	Copper Foil	N/A	MM

PRODUCT:	CAMERALINK CABLE - MDR-26-PIN MALE TO MDR-26-PIN MALE CABLE
----------	---

REV:	A	UNIT:	mm	DRW BY	
SCALE:	N:1	DATE:	01-05-2025	HARSHIL	



KYPTEC
AUTOMATION

	QUALITY SYMBOLS
	☐ : ☒ :
DARSH	CRITICAL MAJOR
	☒ : ☒ :
APPROVER	ZERO DEFECT S.P.C

Tolerance	
x.	± 0.60
.x	± 0.40
.xx	± 0.25

KYPTEC AUTOMATION
www.kyptec-automation.com